
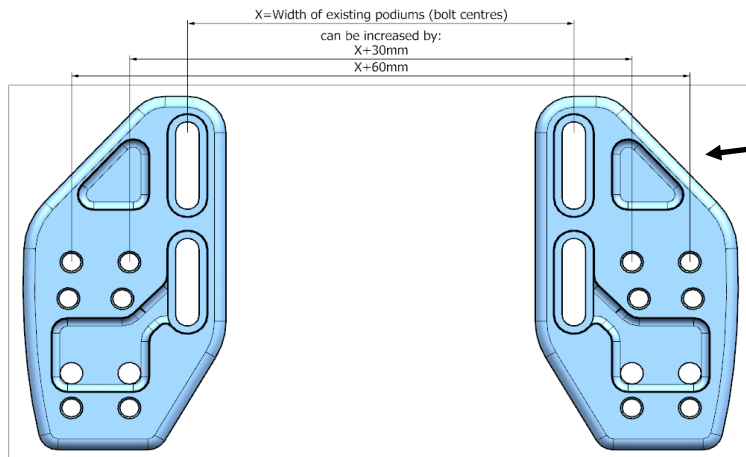


Reach adjustment plates

Key Information

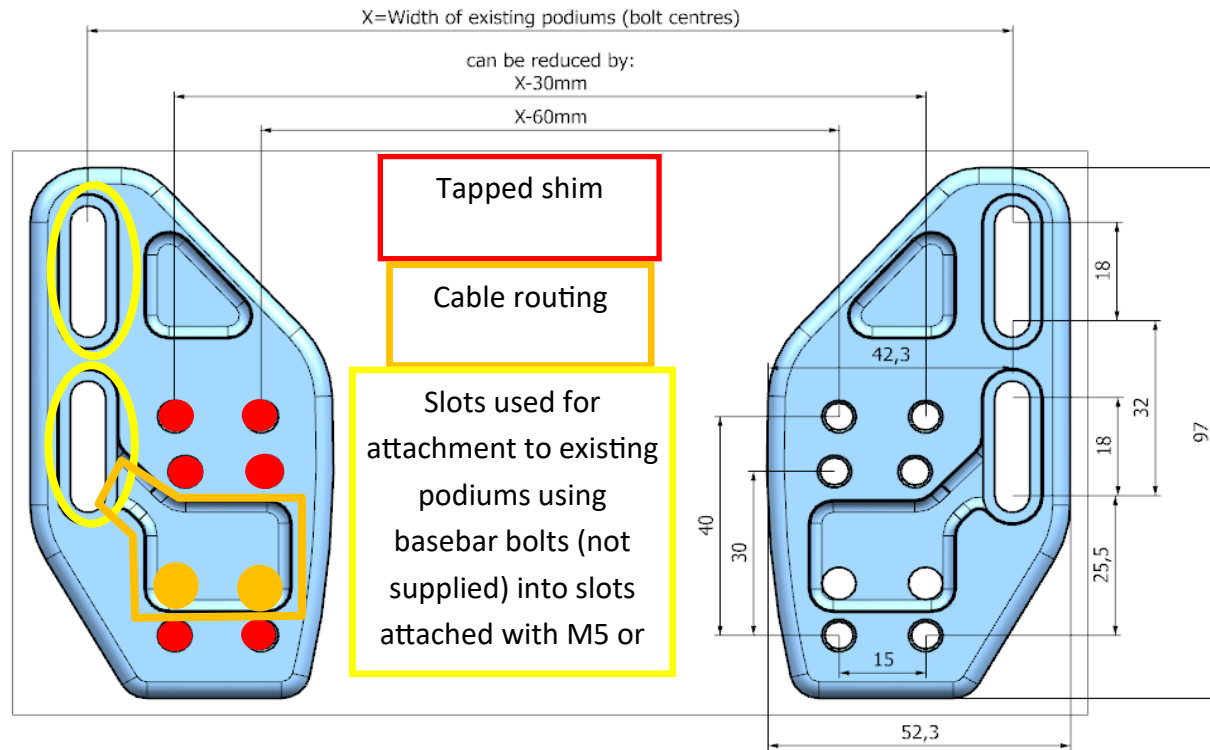


Or use these options:

You can swap the plates over to gain a wider setup (left)


Face the plates forward either way (out or in) to gain extra reach (right)

Note: you will only be able to use the straight shim setup if you choose any of these options as the angled holes would be facing outwards

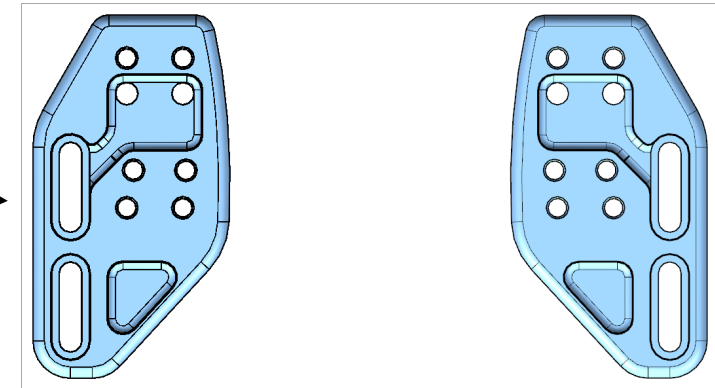

Reach adjustment plates

Key Information

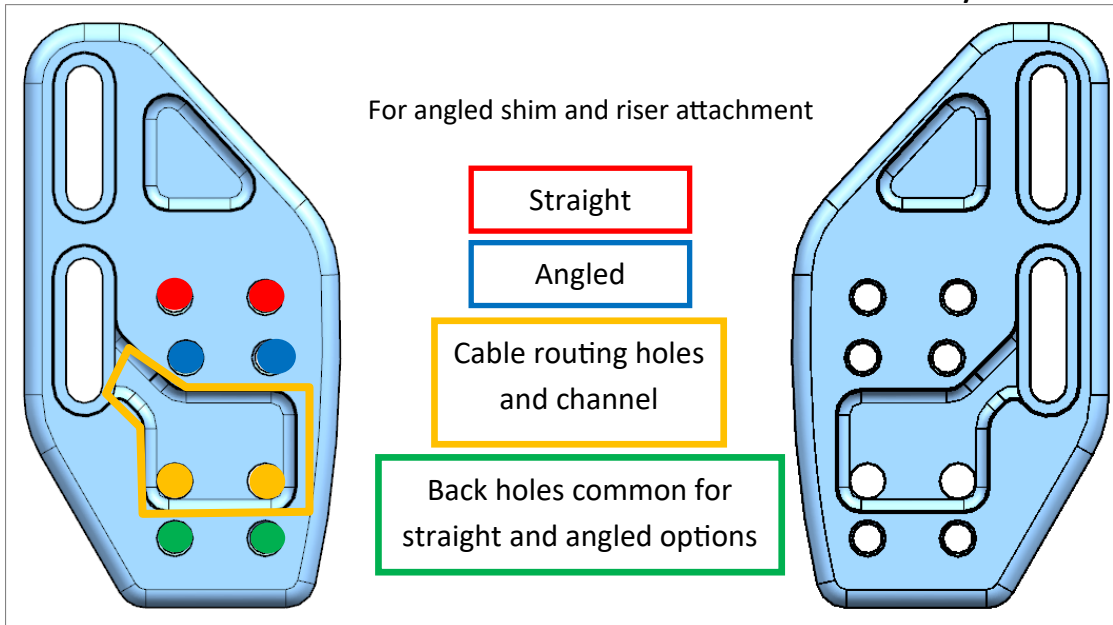

- Suitable for basebar podium width of 90mm+ to enable users with wide podiums to make their cockpit set up narrower.
- Shims can be set straight or angled (to angle arms in).
- Plates can be swapped left to right to allow for a wider podium, however with this set up only a straight shim/riser placement is possible.

Adding a D2Z pole clamp offsets the podium to podium width by 30mm (15mm each side)

Angled shim/riser attachment can be straight or angled (if you want to angle your arms in).

Outer holes provide a 7 deg angle, inner holes 3 deg.

Cable routing is through the long slots if cable is routed into the basebar.

If cable is being routed anywhere else into the frame, the cable holes should be used.

