



Podium width adjustment plates

Key Information

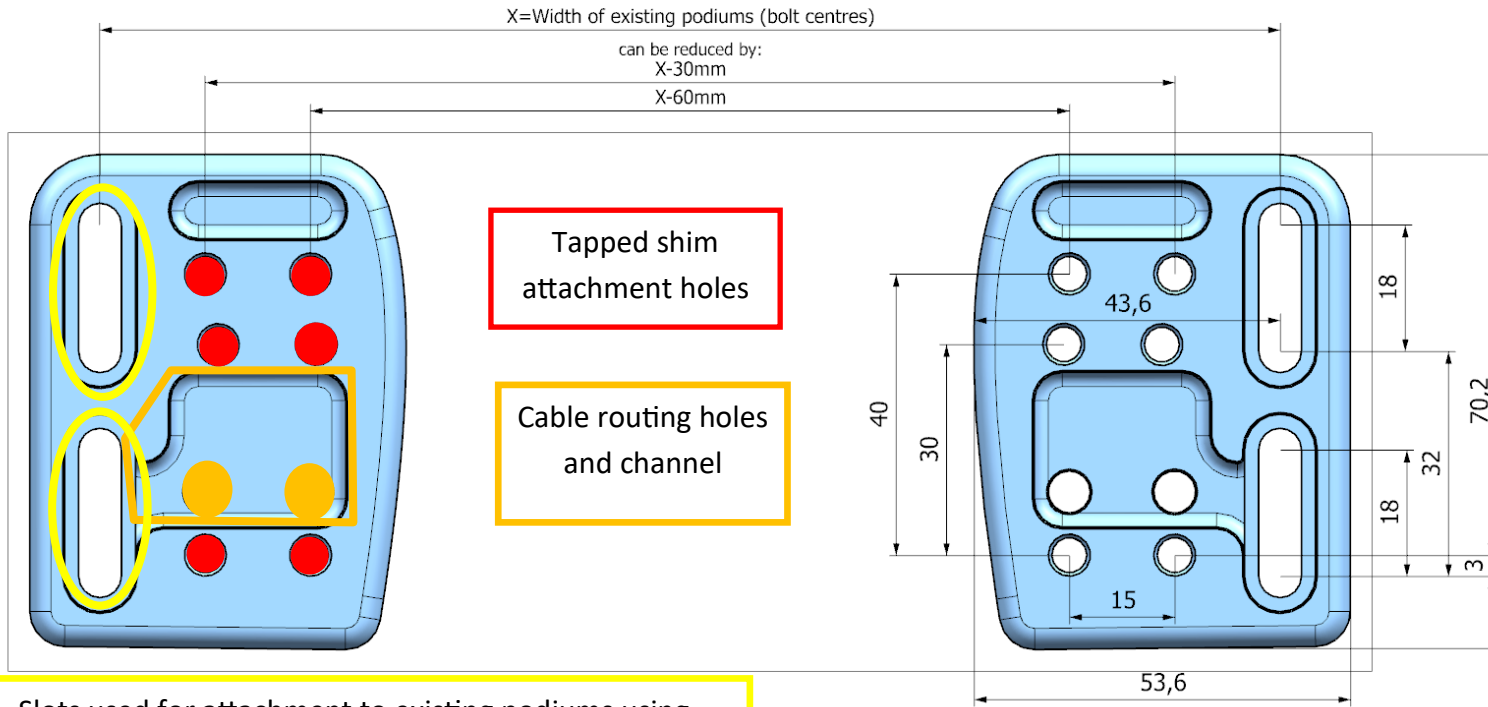


Slots used for attachment to existing podiums using basebar bolts (not supplied) into slots attached with M5 or M6 nuts (supplied)

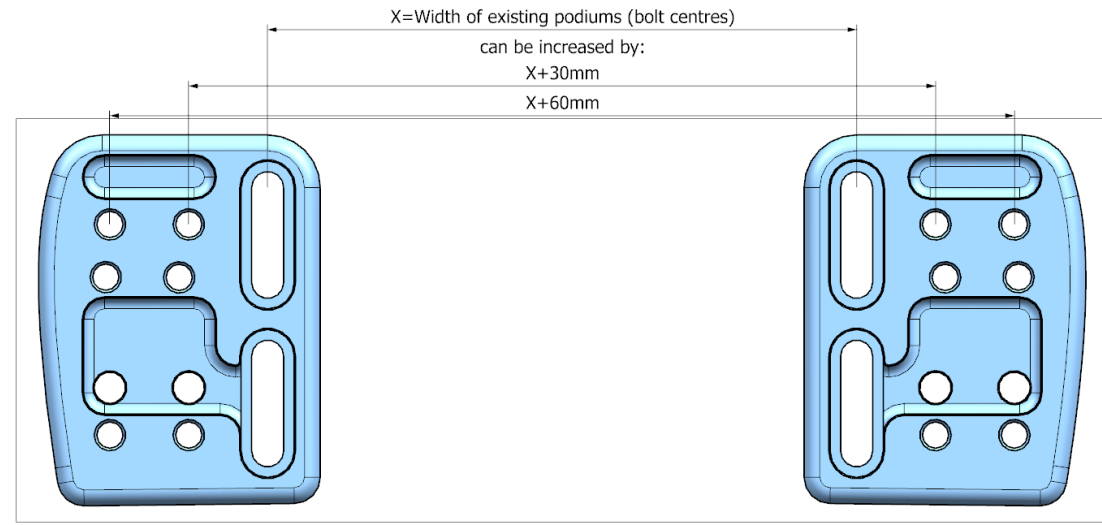

Or

You can swap the plates over to gain a wider setup (so that the left plate is on the right podium and vice-versa)

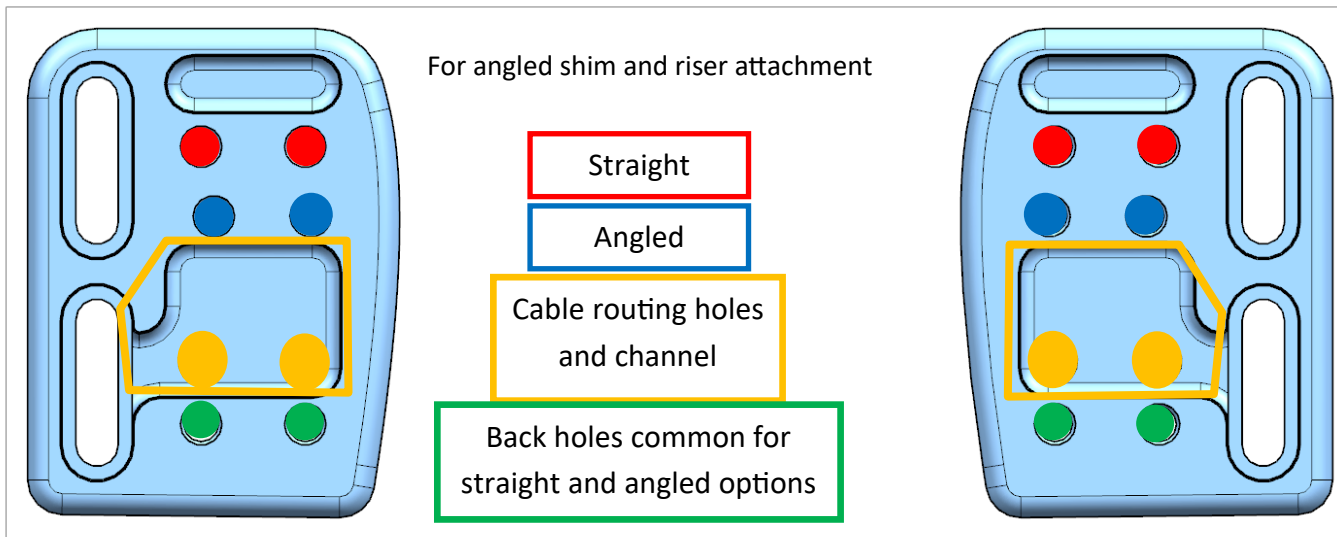

- Suitable for basebar podium width of 90mm+ to enable users with wide podiums to make their cockpit set up narrower.
- Shims can be set straight or angled (to angle arms in).
- Plates can be swapped left to right to allow for a wider podium, however with this set up only a straight shim/riser placement is possible.

Adding a D2Z pole clamp offsets the podium to podium width by 30mm (15mm each side)

Angled shim/riser attachment can be straight or angled (if you want to angle your arms in). Outer holes provide a 7 deg angle, inner holes 3 deg.

Cable routing is through the long slots if cable is routed into the basebar.

If cable is being routed anywhere else into the frame, the cable holes should be used.

