

DRAG2ZERO




.66 Extension Range of Reach

Information regarding the maximum and minimum reach for the .66 extension for each angled shim with a short Shimano grip.

Measurements were taken from the grip end to the Universal Baseplate rearward slot point.

We would recommend either a 15 or 20-degree angled shim with the .66

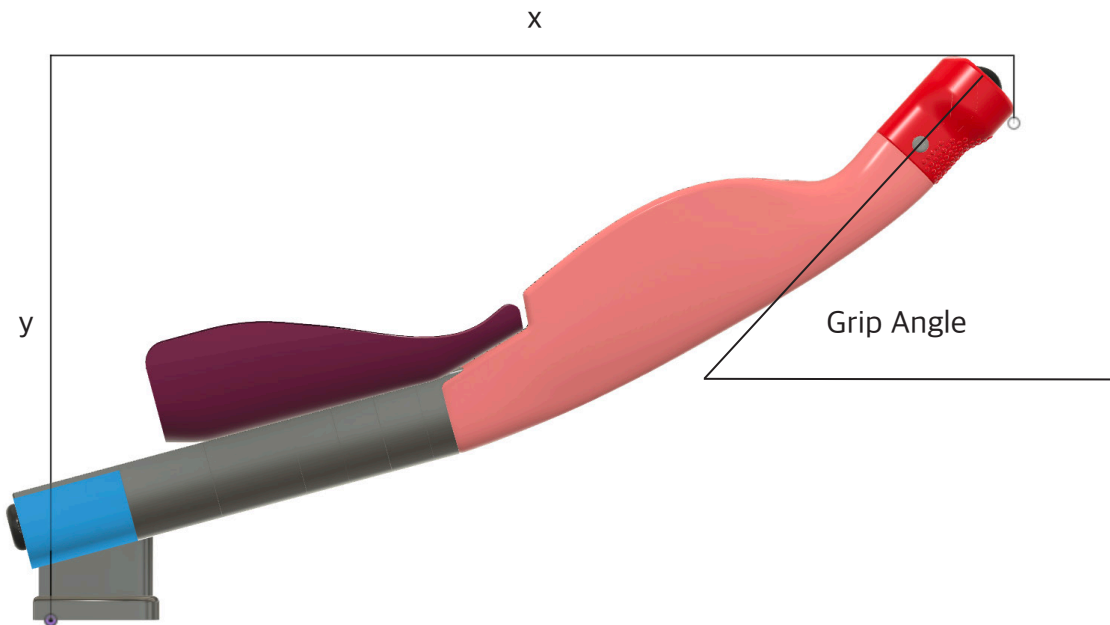

Angle	Measurement	Minimum	Maximum	Effective Grip Angle
15 °	x	303mm	438mm	47.5 °
	y	220mm	257mm	
20 °	x	287mm	419mm	52.5 °
	y	245mm	292mm	
25 °	x	269mm	396mm	57.5 °
	y	266mm	326mm	